

FIREPLACE KIT SYSTEM FROM BRUNNER




BSK 05 mit Panorama-Kamin 57/40/60/40

State: 08.03.2017



BRUNNER[®]
made in germany.

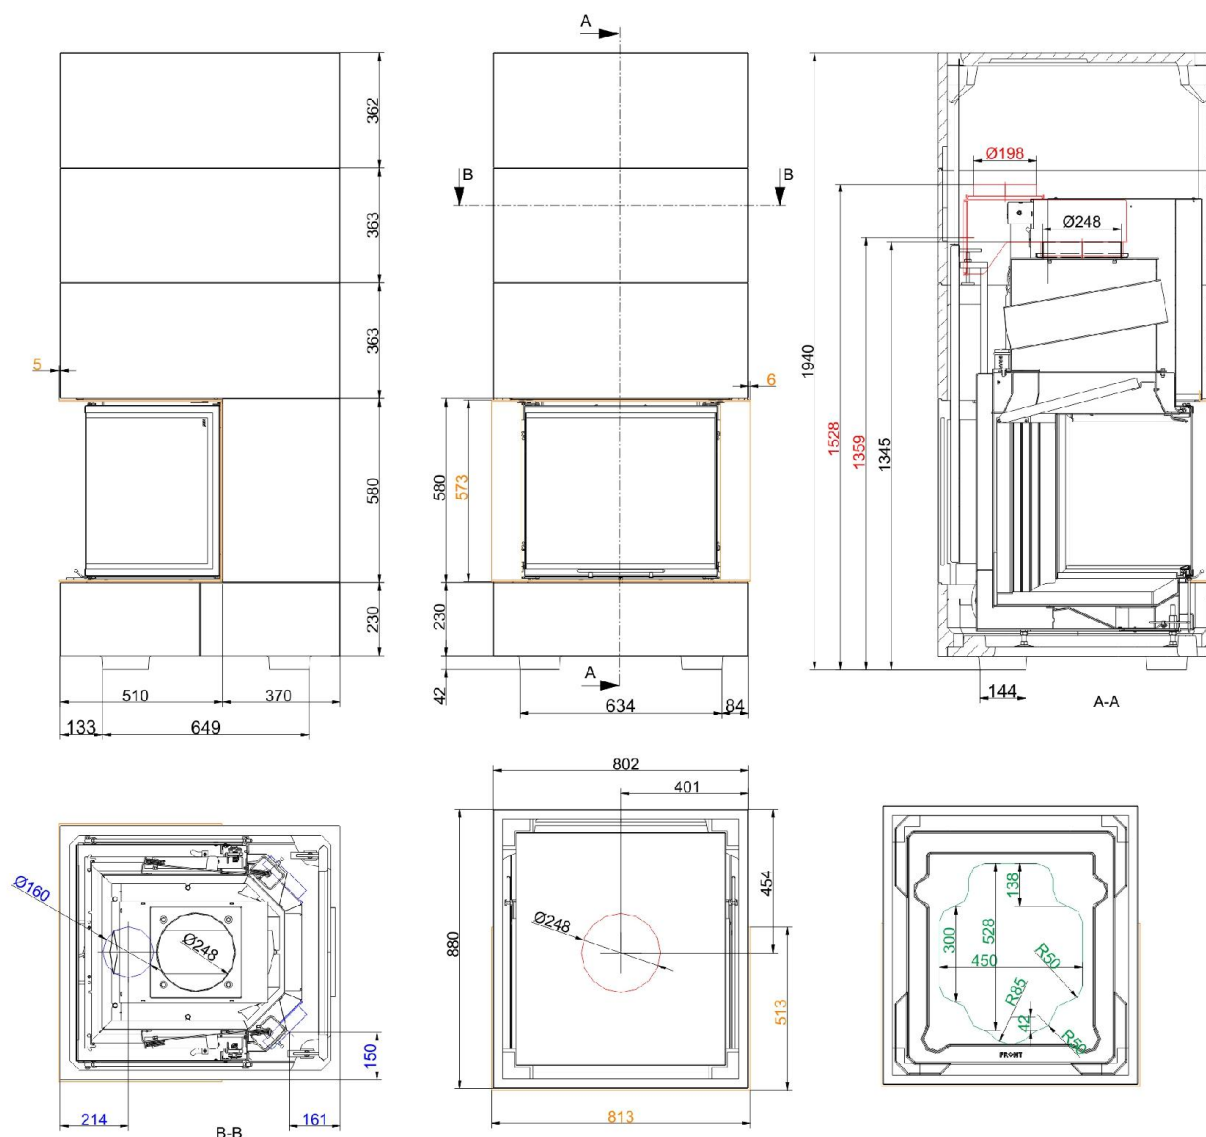

Planning and installation

BSK 05 mit Panorama-Kamin 57/40/60/40

Tested according to

EN 13229

Data for functional demonstration

Rated heat output (heating insert)	kW	13
Firewood consumption	kg/h	4,3
Flue gas mass flow	g/s	14
Flue gas temperature	°C	210
Necessary supply pressure ¹⁾	Pa	12
Combustion air consumption	m³/h	40
Combustion air connection Ø	mm	160

Height extension rings

Footprint (width x depth)	mm	802 x 880
Overall height	mm	1940
Height extension ring	mm	363

Minimum distances BSK / BSO

to adjacent wall	cm	5
to other wall with heat protection panels	cm	0
to protected wall	cm	10
to protected wall with heat protection panels	cm	5
to the ceiling	cm	50

Heat insulation

In ceiling region connection with/without air grate	cm	22 / 16
---	----	---------

Vent cross-sections ²⁾

Supply air	cm²	985
Warm air	cm²	900

Weight

Total weight	kg	586
--------------	----	-----

meets requirement limit values for:

Germany / Austria / Switzerland / Norway	1.BImSchV (Stufe 2) / 15a BVG (2015) / LRV / NS 3059
--	--

1) Throttle flap recommended

2) Existing supply air opening